



MPLS

Multi-Protocol Label Switching

Andrea Bianco
Telecommunication Network Group
firstname.lastname@polito.it
<http://www.telematica.polito.it/>


MPLS: introduction

- MPLS (Multi-Protocol Label Switching) is a network technology proposed by the IETF (Internet Engineering Task Force)
- Objective: to improve the Internet behaviour in
 - Forwarding speed
 - Scalability
 - Quality of Service support
 - Traffic engineering

Comparison with traditional IP routing

- In a packet switching network using the datagram service (connectionless approach), each node executes the forwarding and routing operations independently for each packet, on the basis of the destination address in the packet header
- Each router selects the next-hop (i.e., the output interface) on the basis of the routing table, created through information exchange among routers, according to routing algorithms rules
- Due to the address structure in the Internet (masks) the search procedure in the routing table is a fairly complex “longest prefix matching”


MPLS: the basic idea



- Routing based on packet label, not on IP address
- 
- Connection-oriented mode of operation over Internet
 - How?
 - Label swapping
 - Packet forwarded over pre-computed paths named LSP (Labelled Switched Paths)
 - Why?
 - Faster search in the forwarding table
 - Routing determined once per flow, a-priori
 - Enables use of traffic engineering techniques (related to QoS routing)



Acronyms and definitions

- LSR (Label Switching Router) : router able to execute both MPLS and IP
- FEC (Forwarding Equivalence Class): set of IP packets that:
 - follow the same path in the MPLS network
 - are processed in the same way by any LSR
- Label: a short identifier, of fixed length, used to identify a FEC. More labels can be **stacked**, i.e., inserted in a last-in first-out sequence (like in a stack) to create a hierarchy that allows tunneling
- LSP (Label-Switched Path): path through one or more LSR within the same hierarchical level followed by packets in a given FEC
- LER (Label Edge Router): LSR at the border of the MPLS cloud
 - Ingress LERs must classify IP packets (if not already classified) by assigning a proper label
 - Egress LERs remove the label and forward the original IP packet toward the proper destination
 - Permit to keep standard host behaviour


Label swapping

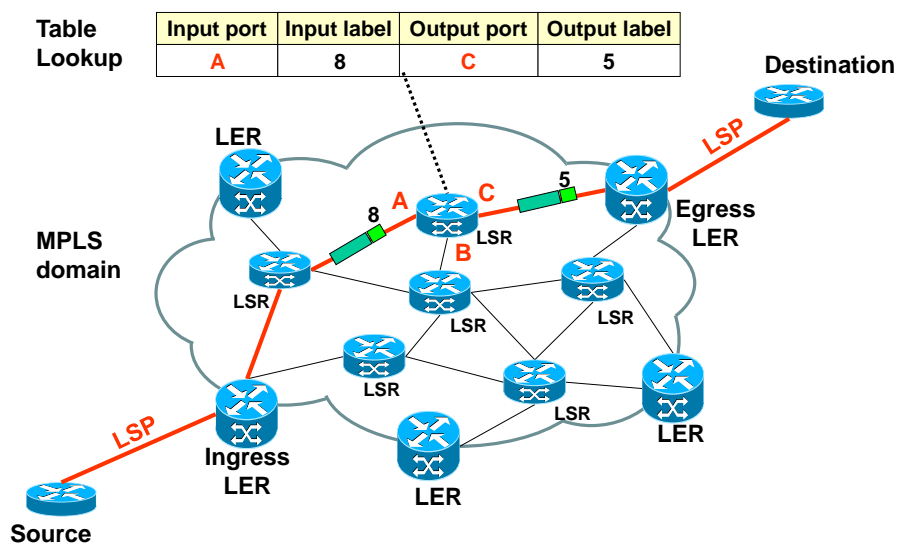

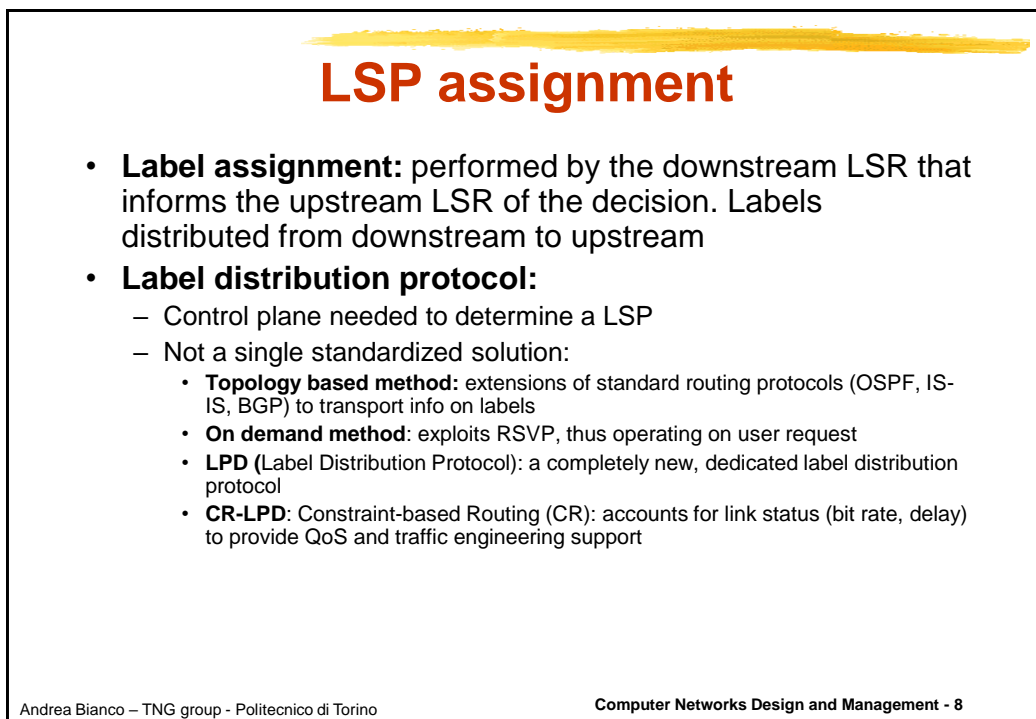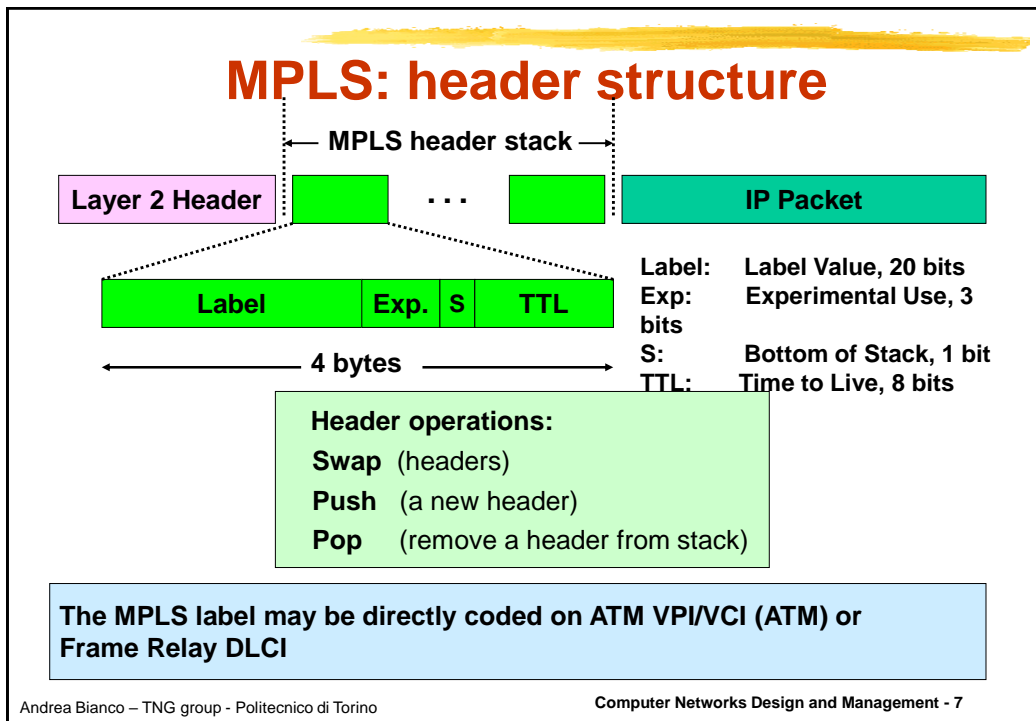

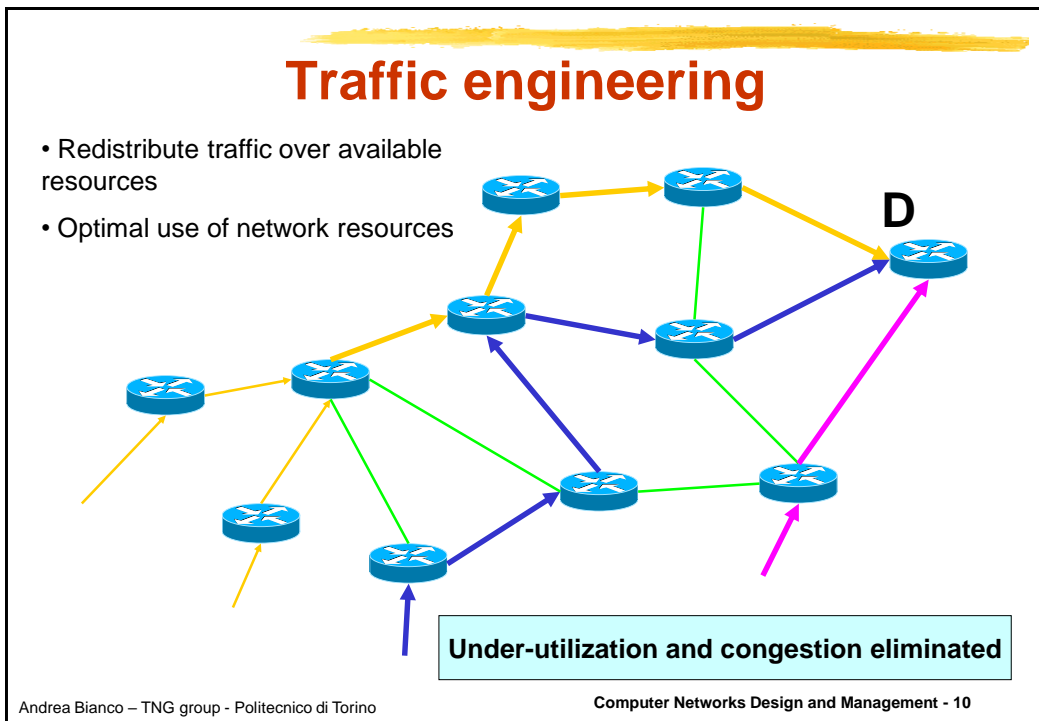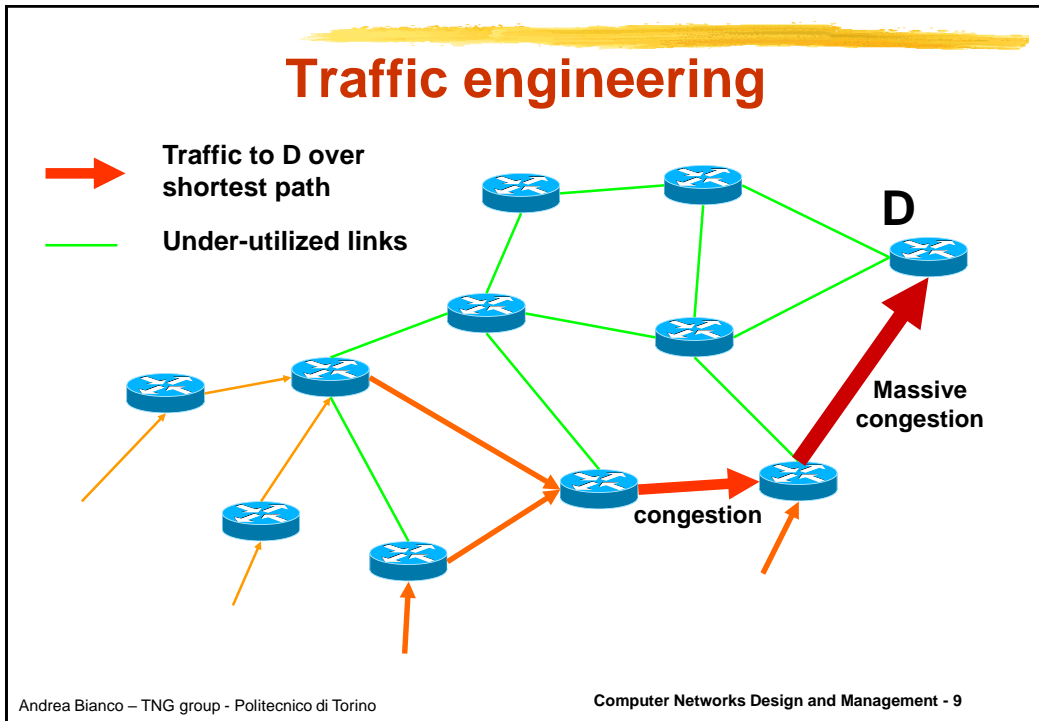

MPLS goal

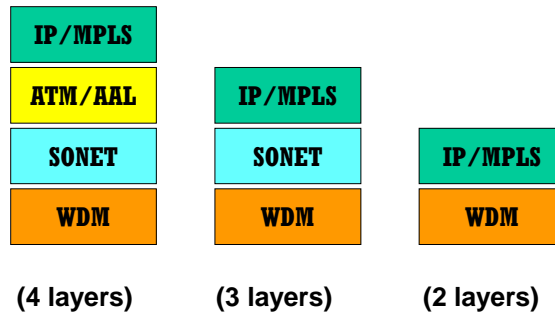

MPLS and WDM

- The WDM (Wavelength-Division Multiplexing) and DWDM (Dense WDM) technologies make available a huge fiber transmission capacity
- Intelligence needed in the optical control plane to guarantee:
 - Real time lightpaths provisioning with traffic engineering capabilities
 - Protection and restoration
 - Interoperability
- Generalized Multi Protocol Label Switching (formerly MP λ S) is a generalization of MPLS to integrate IP and WDM
 - Labels \leftrightarrow Lambdas (Wavelengths)
 - Label Switching Router \leftrightarrow Optical Cross-Connect (OXC)
 - Label Switched Path \leftrightarrow Lightpath

MPLS vs GMPLS

- Differences among OXCs and LSRs
 - LSR operate at the packet level
 - Forwarding info is explicit on the packet, implicit on the wavelength
 - Number of lightpaths that an OXC is able to manage is smaller, with a high bandwidth granularity
- Differences among LSP and lightpaths
 - LSP support label stacking

MPLS: summary

- Use in the core part of the network
- Flexibility in FEC definition: ingress router may force packets to follow paths according to peculiar policies (QoS, traffic engineering)
 - Forwarding MPLS may be changed dynamically by devices able to analyze network status
- Permits
 - Traffing Engineering
 - Support for QoS (IntServ) and CoS (DiffServ)
 - VPN (Virtual Private Network)
 - Policy based routing
- MPLS provides tunnelling capabilities
 - Label stacking
- MPLS easily interoperates with IP